




GPS RECEIVER

GPS 124

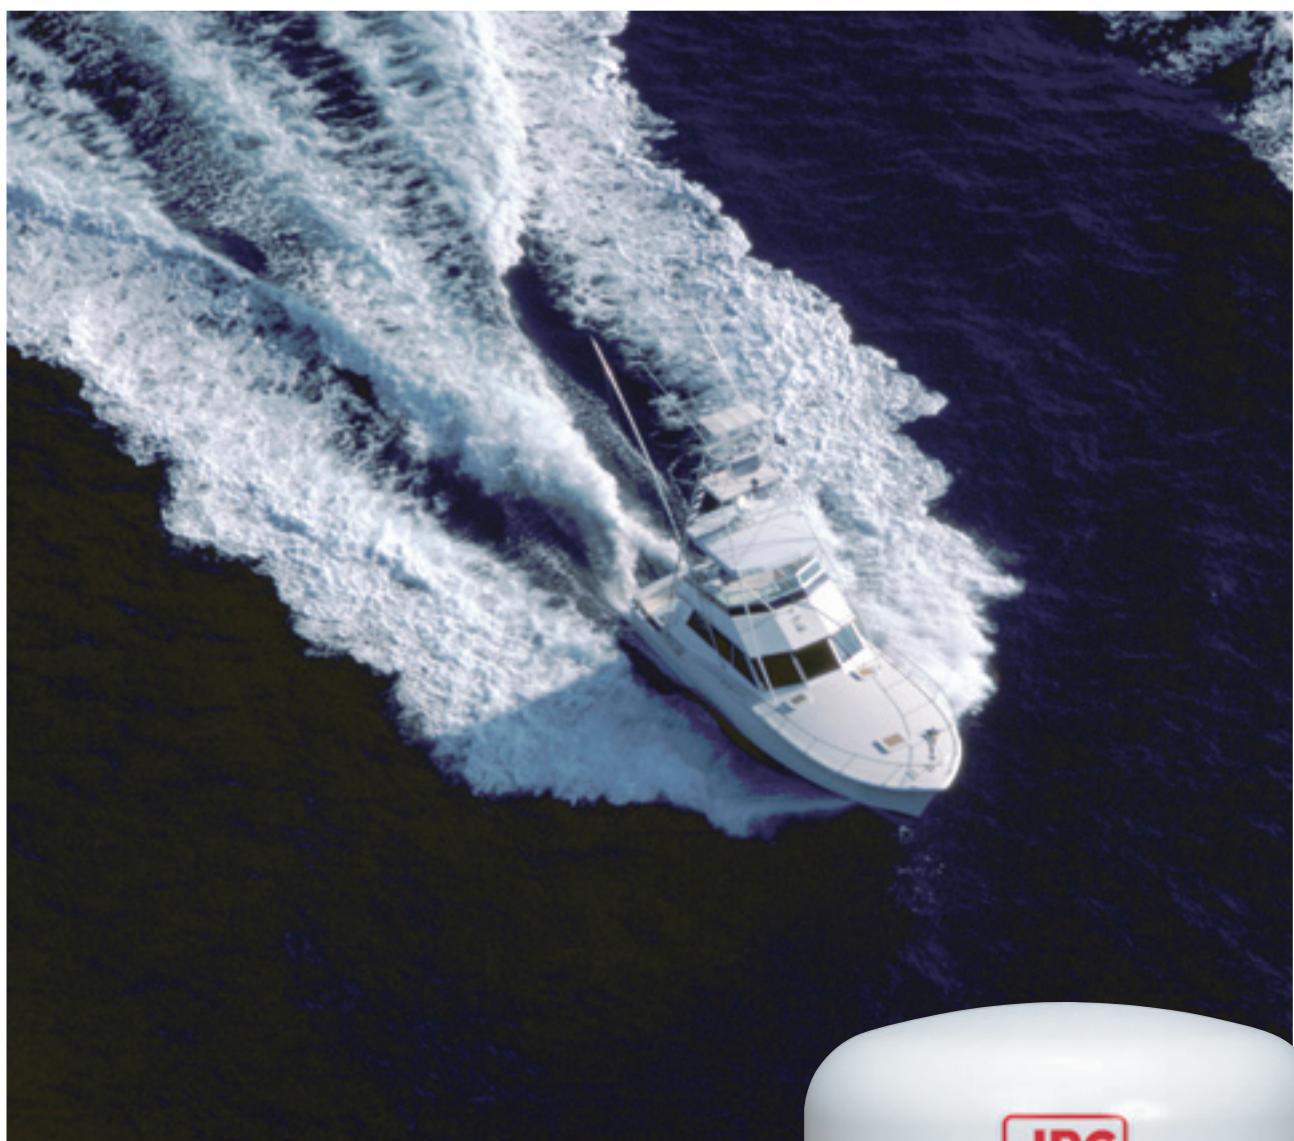

- Capable of SBAS (WAAS/EGNOS/MSAS) correction
- RAIM function is available
- 12-Channel Parallel for simultaneous reception of 12 satellites.
- IEC61162-1, NMEA0183 Output



Japan Radio Co., Ltd.

■ FEATURES

Internal SBAS receiver

The GPS124 includes a SBAS (WAAS/EGNOS/MSAS) receiver. By using SBAS you can achieve precise position.

RAIM function

The accuracy of position fixes is self-tested by the GPS124. (RAIM function)

This function assures higher reliability to the position fix than conventional method.

12-Channel Parallel for Receiving 12 Satellites Simultaneously

The GPS 124 is designed to simultaneously receive signals from 12 orbiting satellites, ensuring the most accurate positioning.

IEC61162-1, NMEA0183 Output

Since the output data is changeable between IEC61162-1 (NMEA0183 version 2.3), NMEA version 1.5 and 2.1, you can connect the GPS124 to various Marine Electronics Equipment such as Marine Radars, Fishfinders, Plotters, or others.

■ SPECIFICATIONS

GPS Specifications

Receiver type: Multichannel (12-CH, SBAS 1-CH) all-in-view
Frequency: 1575.42MHz ± 1MHz (C/A code)

Sensitivity: -135dBm for acquisition, -138dBm for tracking
Accuracy: 13m 2DRMS (C/A code, HDOP≤4, SA OFF)

7m 2DRMS when SBAS corrected
Time to first fix: Typically 40 seconds (cold start fix)

Typically 33 seconds (warm start fix)

Position update: Normally every 1 second

General

DGPS input: RTCM SC-104 ver. 2.0 type 1, 2, 7, 9 available
Data output: Signal output port, TTL level

IEC61162-1 (NMEA0183 ver. 2.3), NMEA 0183 ver. 1.5 or 2.1 selectable

IEC61162-1 (ver2.3) GGA, RMC, VTG, ZDA, DTM, GBS, GNS

ver1.5 GGA, RMC, GLL, VTG

ver2.1 GGA, RMC, GLL, VTG, DTM

Geodetic datum: 46 (WGS-84, WGS-72, Japan, America, Canada / Alaska, Europe, Australia, England, NAD-83, other 37 selectable)

Input voltage: 12/24 VDC +30%, -10% (less than 1.5W)
(Power Consumption)

Data cable: 10m

Operating temperature: -25°C to 70°C


Water proof: USCG CFR-46/IEC60945

■ COMPONENTS


No.	Name	Type	Q'ty	Remarks
1	GPS Receiver	JLR-4340	1	includes 10m cable
2	Instruction manual		1	

● Option : 15m Extension Cable CFQ-9000

■ SYSTEM CONFIGURATION

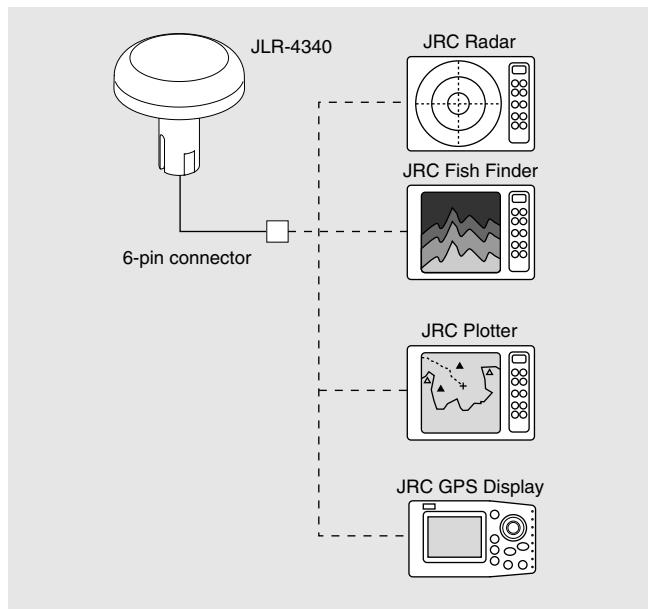

■ OUTLINE DRAWING

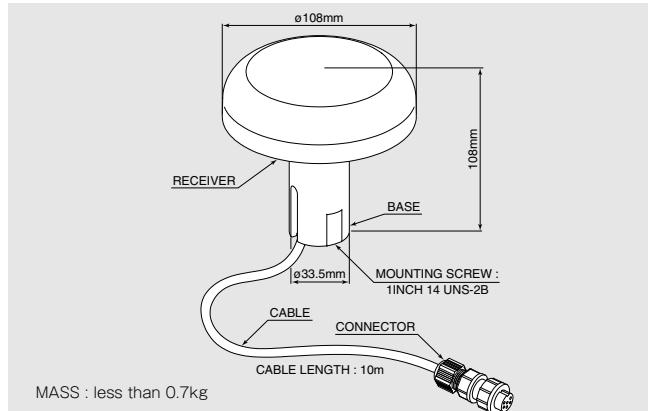

● Specifications subject to change without notice.



Caution

Before attempting to operate this unit, read the instruction manual thoroughly to correctly and safely operate the unit.

For further information, contact:



Since 1915

Japan Radio Co., Ltd.

URL <http://www.jrc.co.jp/eng/>

Main Office: Fujisawa bldg. 30-16, Ogikubo 4-chome Suginami-ku, Tokyo 167-8540, Japan
Telephone: +81-3-6832-1816
Facsimile: +81-3-6832-1845

Overseas Branches : Seattle, Amsterdam, Athens, Manila
Liaison Offices : Taipei, Jakarta, Singapore, Hanoi, Shanghai, Hamburg, New York